



**THEDE & WITTE**  
FERTIGPARKETT

# TECHNICAL DATA SHEET

## BOSTON 1-STRIP OAK S

10 mm


### DIMENSIONS

- **Length:** 1.860 mm
- **Width:** 148 mm
- **Thickness:** 10 mm

### PRODUCT COMPOSITION

- **Top layer:** approx. 2.5 mm real wood
- **Core:** 5 mm plywood poplar
- **Back veneer:** 2 mm longitudinal poplar wood veneer

*Slight bevel on long side, products with hand-planed surface on long and short side*

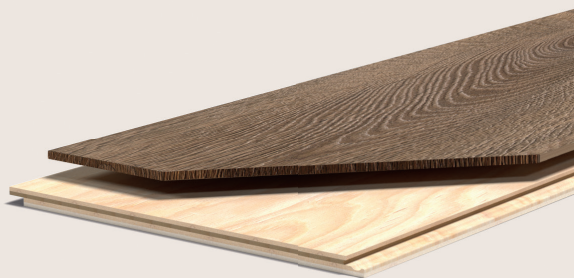

### SURFACE FINISH

WOCA naturally oxidative hardened oil surface – ready for interior use. With due regard to initial care and maintenance instructions recommended by the manufacturers, suitable for residential and commercial areas. For use in commercial areas, special measures are necessary after consultation with the manufacturer.

### GLUE

Aica Aibon P-4405  
or equivalent

### CONNECTION

Uniclic® click system  
on long and short side

### COUNTRY OF ORIGIN

China

### PACKAGING

- |                  |           |                       |
|------------------|-----------|-----------------------|
| • <b>Pack:</b>   | 12 boards | 3.30 m <sup>2</sup>   |
| • <b>Pallet:</b> | 42 packs  | 138.60 m <sup>2</sup> |

### CERTIFICATION

E1 classified; fire class Dfl-s 1.  
Suitable for warm water (except Oak antique smoked white oiled) underfloor heating systems with due consideration of the standardized specifications. Suitable for professional floating installation or full surface bonding. Please observe and follow the installation (laying) instructions.